Attention Rebuilder/Installer



Replacement Ford 6F50/6F55 Transmission Solenoid Body Codes Needed for Vehicle Powertrain Control Module Update

It's recommended to follow the vehicle manufacturer's service instructions for the application when replacing a transmission solenoid body.

If required to update the vehicle Powertrain Control Module (PCM) using a diagnostic / scan tool, the installer will need two (2) codes – each marked on the solenoid body beneath a 2D matrix as **shown at right.**

A tag on top of the transmission contains the original Strategy and Body ID codes. **This tag** may be covered with a tag that includes the new codes from the replacement Solenoid Body – see example shown below (adhesive label is approximately 35mm x 70mm).


Replacement Solenoid Body F00HZ30038

SOL STRATEGY: (13-digit code)

SOL BODY ID: (7-digit code)

Tag with new codes from the replacement Solenoid Body

F00HZ30038 - Replacement Ford 6F50/6F55 Transmission Solenoid Body

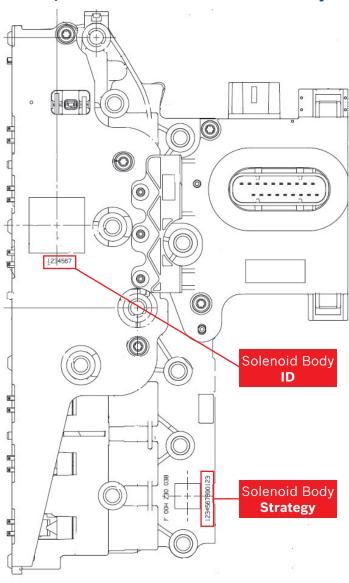

For further information, consult the vehicle manufacturer's service instructions.