


Lockup Control Plunger Valve Kit

Part No. 33510N-11K

- Plunger Valve
- Plunger Sleeve

Jatco/Nissan JF016E (RE0F10D), JF017E (RE0F10E)

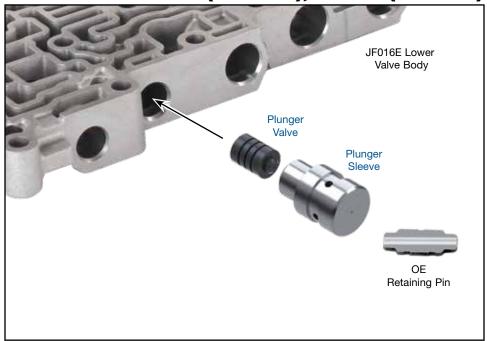

1. Disassembly

- a. Remove OE retainer and set aside for reuse.
- b. Remove and discard OE plunger sleeve and valve.

2. Installation & Assembly

- a. Be certain all debris has been removed from the valve bore and valve body.
- b. Install Sonnax lockup control plunger valve and sleeve assembly into bore, open end first.
- c. Secure lineup by reinstalling OE retainer.

3. Final Testing

Vacuum testing at the port(s) indicated holds the recommended minimum 18 in-Hg.

