


## Input Clutch PowerPack® Nissan / Infiniti RE5R05A

## ALTO PART # 174756 Alto # 174756 POWERPACK® CONTENTS: (8) 174746-152 (1.52mm/.060") Red Eagle® Friction Plates (8) 174701K170 (1.70mm/.067") Kolene® Steel Separator Plates

(1) 174761 (4.37mm/.172") Top Pressure Plate (1) 026251-062 (1.57mm/.062") Snap Ring (1) 026251-058 (1.47mm/.058") Snap Ring

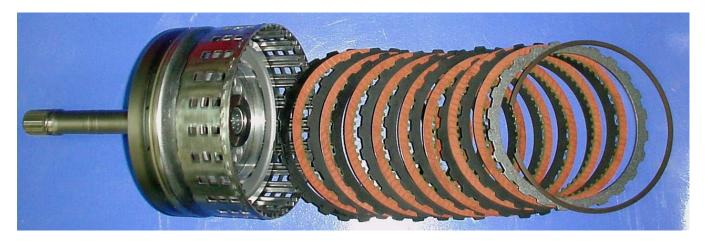

Alto received several requests from builders around the world to produce a PowerPack<sup>®</sup> that provides more capacity for the Input clutch of the RE5R05A transmission. Now you can replace the 6 friction elements with 7 friction elements and the 7 friction elements with 8 friction elements in the Input drum of this unit.

## **INSTALLATION INSTRUCTIONS**

Stack the Input clutch pack as follows; start with a 1.70mm Kolene<sup>®</sup> steel plate, alternate installing friction and steel plates ending with a friction plate (7 or 8 Red Eagle<sup>®</sup> frictions / 7 or 8 Kolene<sup>®</sup> steels). Install the 4.37mm pressure plate and .062" snap ring. Using a feeler gauge, measure the clearance between the snap ring and the pressure plate in three different locations, if the clearance is not correct use the OE .079" snap ring or the .058" snap ring provided in this kit.

Clearance should be 1.15 – 1.65 mm (.045" to .065")