

Oversized Bypass Clutch Control Valve Kit



Part No.

73840-BK

- Bypass Clutch Control Valve
- Plunger Valve
- Bypass Clutch Sleeve
- Lubrication Plugs (4) 1 Extra


Tool Kit

Part No.

73840-BTL

- Reamer
- Reamer Jig
- Drill Bits (3)

Ford CD4E, Mazda LA4A-EL

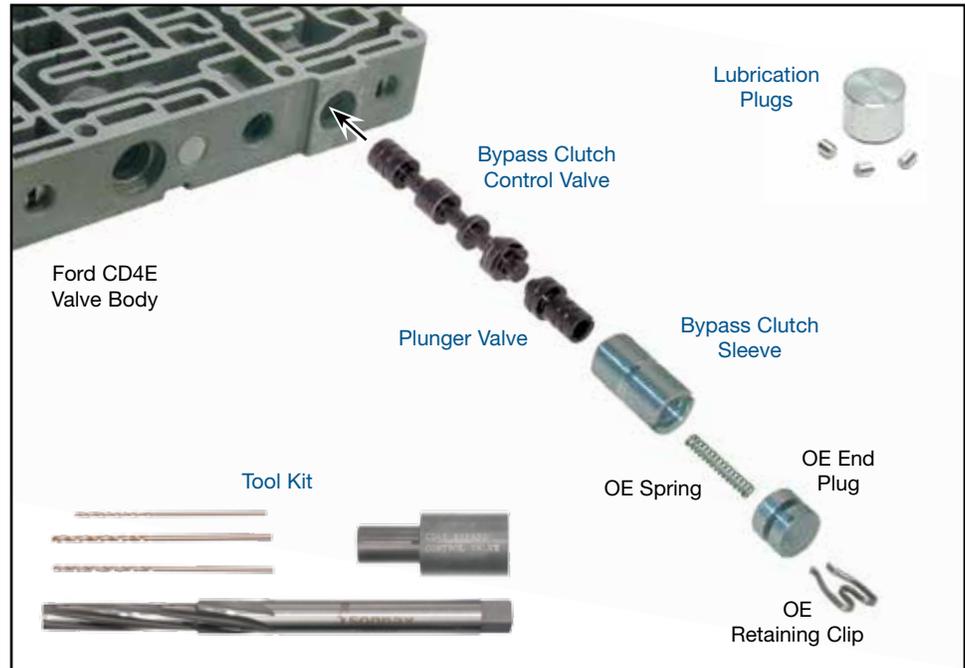

1. Disassembly

- Remove OE retainer and end plug. Set aside for reuse.
- Remove OE spring. Set aside for reuse.
- Remove and discard OE bypass sleeve and plunger valve.
- Remove and discard OE bypass clutch control valve.

2. Bore Reaming

Ream bypass clutch control bore (for reaming instructions/reamer care, please visit www.sonnax.com). Sonnax reaming tool kit **73840-BTL** is required for this operation.

3. Installation & Assembly

- Thoroughly clean debris from valve bore and body.
- Install Sonnax bypass clutch control valve as pictured.
- Install Sonnax bypass clutch control plunger valve and sleeve.
- Reinstall OE spring and end plug.
- Secure with OE retainer.

4. Lube Circuit Modification

Though not required for Sonnax kit to operate correctly, the following modifications are recommended to increase lube and converter pressure. Drill bits are included in tool kit for this purpose.

4. Lube Circuit Modification continued

a. Lightly countersink (**Figure 1**) the CCX (regulated converter charge) hole approximately 1/32" deep on both sides of the transfer plate with included 5/16" drill bit. This will create a shoulder to wedge Sonnax aluminum plug onto. Insert the 1/4" diameter x .225" long aluminum Sonnax plug and drive into hole then peen into counter sink on both sides tightly. Verify case side of plate is flush, and stone or file if necessary. Drill a .042" orifice hole in this plug. Use Sonnax .062" drill bit to taper/countersink the entry side of the .042" hole.

- b. On the transfer plate (**Figure 1**), drill a .062" hole through the indicated wall. This will connect the line pressure circuit to the differential lube circuit.
- c. On the transfer plate (**Figure 1**), drill a .052" hole through the indicated wall. This will connect the differential and front lube circuits.
- d. Drill orifices "S" and "T" on the control valve body separator plate (**Figure 2**) to .062". Insert Sonnax small aluminum pegs (.062" diameter x .075" long) into holes and peen over on both sides.

